

Self-Contained Freewheels

FSO 300-700, FSO-GR 300-700, HPI 300-700



TYPE



FSO..GR


Types FSO, FSO-GR, and HPI 300 to 700 are sprag type freewheels self-contained, sealed and bearing supported, using two ball bearings.

Units are delivered oil or grease lubricated according to the type. It is a Formsprag USA design with a »full sprag complement« that gives a very high torque for a

given diameter. Any overload is resisted by a sprag to sprag abutment, avoiding a sprag tilt over. Types FSO and HPI are oil lubricated and use standard shaft lip seals. Type FSO-GR is grease lubricated and can be equipped with contact free labyrinth seals. Type HPI is specially designed for high speed indexing applications.

Self-Contained Freewheels

FSO, FSO-GR, HPI 300-700

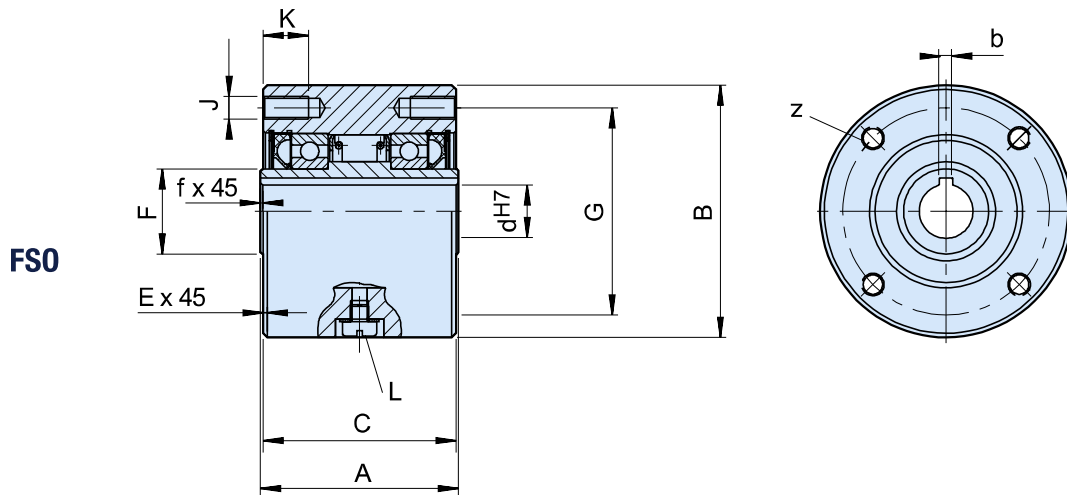

Type	Size			Overrunning speeds										Number								Lubricant			Weight	Drag torque
FSO FSO-GR HPI			FSO	FSO-GR	d ^{H7} -bxh	d ⁴⁾	A	B	C	E	F	G	z	J	K	L	f	FSO	FSO..GR	HPI		T _R				
		T _{KN} ¹⁾	n _{max} ²⁾	n _{max} ³⁾		min-max		-0,05																		
		[Nm]	[min ⁻¹]	[min ⁻¹]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]			[mm]		[mm]	[ml]	[ml]	[ml]	[kg]	[Ncm]				
	300	374	3000/900	3600/900	15-5x5	12... 19	63,50	76,20	60,45	1,6	28,58	66,67	4	M8	13	M6	0,8	7	10	14	1,6	18				
	400	408	2800/850	3600/850	18-6x6	12... 22	69,85	88,90	68,07	1,6	30	73	4	M8	13	M6	0,8	10	20	20	2,7	27				
	500	1598	2500/800	3000/800	30-8x7	19... 33	88,90	107,95	85,73	1,6	45	92	4	M8	16	M6	1,5	22	35	35	4,8	31				
	600	3060	2200/750	2400/750	40-12x8	24... 57	95,25	136,525	92,2	1,6	65	120,6	6	M8	16	M6	1,6	52	84	84	8,6	62				
					45-14x9																					
					50-14x6																					
					50-14x9																					
	700	6800	1600/450	2000/450	60-18x11	48... 82	127,00	180,975	123,85	1,6	90	158,75	8*	M10*	20	M6	1,6	168	280	280	19	156				
				65-18x11																						
				70-20x12						101,6 ⁵⁾																

NOTES

1) $T_{max} = 1,5 \times T_{KN}$
» Refer to Selection page 7 to 11

2) Inner race/outer race

3) Inner race/outer race labyrinth seal

4) Inch bore available on request

5) Only for oversize bore
Size 600 > 50 mm
Size 700 > 75 mm

*) 6 holes equally spaced at 60° plus
2 extra-holes at 180°

» Refer to mounting and maintenance instructions
page 12 to 13

MOUNTING EXAMPLE

